Continental High-Performance Washer-Extractor, 25 lbs. Capacity, Hard Mount

REM025

ARCHITECTURAL/MECHANICAL PRODUCT SPECIFICATIONS


0

 \oplus

VENDED HARD-MOUNT WASHER-EXTRACTOR

PRODUCT SPECS	
Capacity Ibs	25
Cylinder Diameter inch	21.1
Cylinder Depth inch	17.3
Cylinder Volume cu ft	3.5
Net Weight Ibs	317
Crated Weight <i>lbs</i>	342
Machine Dimensions <i>inch</i> WxDxH	27 x 31.4 x 42.5
Door Opening inch	12.7
Floor to Door inch	15.4
Shipping Dimensions <i>inch</i> WxDxH	27.8 x 32.7 x 49.2
Washing Speed rpm	54
Spin Speed rpm	54/100/410/500/580/600
G-force	48/75/100/108
Static Force Transmitted <i>lbs</i>	428
Dynamic Force Transmitted <i>lbs</i>	589
Frequency of Dynamic Force Hz	10
Available Voltages/Wire Conductor/A	Amp 120/60/1, 3W, 15 208-240/60/1, 2W+G, 5
Drain Diameter inch	2
Water Inlets inch	2 @ 3/4
Recommended Water Pressure PSI	30-60
Water Flow gal/min	8
Total Power kW	0.35

^{*} Specifications subject to change without notice or obligation. Contact Continental Girbau at (800) 256-1073 for dimensions not shown or for clarification.

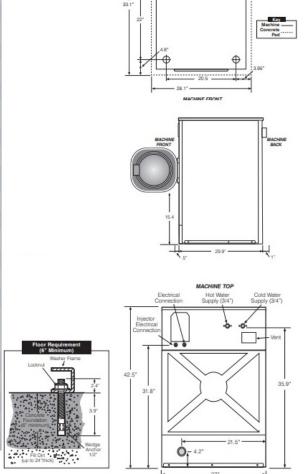

*We will be using the 120V/60/1.3W,15 Model